

UDB-B

OMEGA 125

An extremely diffusive underlay for installation directly on the thermal insulation or wood sheathing.

FIELD OF APPLICATION

- for vented pitched roofs
- high quality protection for wood and insulation
- installation directly on the thermal insulation or wood sheathing

ADVANTAGES

- rain-tight
- wind-tight
- UV-stability
- easy to cut
- non-glare
- anti-slip

RECOMMENDED ACCESSORIES



OMEGA QUILLI



OMEGA Nail-Seal Tape



PE Nail-Seal Tape DSK

AVAILABLE IN THE FOLLOWING DIMENSIONS

Roll width	0,50 m	0,75 m	0,95 m	1,50 m	3,0 m
Roll length	50 m	50 m	50 m	50 m	50 m
Roll area	25 m ²	37,50 m ²	47,50 m ²	75 m ²	150 m ²
Roll weight	4 kg	5,5 kg	7 kg	10 kg	18 kg

PRODUCT DATA ACCORDING TO STANDARD EN 13859-1 / EN 13859-2

Material composition	3-layer PP fleece	
Thickness	0,35 mm	
Colour	anthracite	
Weight per unit area	125 g / m ² (± 5)	
Sd - value	0,025 m	
Temperature resistance	- 40 °C - + 80 °C (short-term 100 °C)	
UV - resistance	4 weeks	
Resistance to water penetration EN 1928	W1	
Elongation EN 12311-1	65 %	70 %
Tensile strength EN 12311-1	305 (± 45) N / 50 mm	
	180 (± 25) N / 50 mm	
Tear propagation resistance EN 12310-1	150 (± 50) N	100 (± 50) N
Storage	cool and dry	
Fire performance EN 13501-1/EN 11925-2	E	

04.2018_EN

ISOCELL

GUIDELINES FOR INSTALLATION OF **OMEGA** ROOF UNDERLAY

(1) Underlay (unsupported)

OMEGA roof underlay is nailed parallel to the eaves with a slight drape and laid and mechanically fixed above the rafters. Vertical overlaps/joins must always lie on a rafter. All overlaps must be bonded with OMEGA Quilli. Horizontal underlay panels can be joined using SK-DUO's adhesion as provided or with OMEGA Quilli. (no pressure need be applied).

(2) Underlay (supported)

OMEGA roof underlay is laid on sheathing parallel to the eaves. The blankets are fixed with concealed nails spaced at 10 cm at the ridge-side edges (marks at edge). All overlaps/joins must be bonded with OMEGA Quilli (without applying pressure) or the integrated adhesive strips (applying adequate pressure). For the raintight version (temporary cover) a nail-seal under the counter batten (OMEGA Quilli or OMEGA Nail-seal Tape) is necessary. The single-sided nail-seal tape must be attached to the roof underlay directly beneath the counter batten!

(3) Eaves construction

We recommend an eaves construction with drainage below the gutter so that snowmelt build-up can easily drain off. We recommend the use of a metal sheet to drain off water.

(4) Ridge area

The ridge area is closed directly when covered with OMEGA roof underlay. This provides immediate protection against water penetration. In non-insulated lofts and/or ventilated interior insulation the ridge formation must be made open: the blankets end 3 cm before the ridge apex, counter battens are mounted and a 50 cm wide strip of OMEGA roof underlay must be attached over the roof apex.

(5) Valley formation

The first step in valley formation is to lay a continuous valley blanket.







(6) Penetrations

Sections cut out for roof penetrations (extractor pipes, roof windows, chimneys, etc.) should be kept as small as possible and the ends of the sheets must be fixed so that no rain or snow can penetrate. To achieve a perfect seal the appropriate sealing tapes and sleeves supplied by ISOCELL GmbH must be used.

Make sure that the substrate is clean! The manufacturer can accept no liability for mechanical damage. The applicable regulations and guidelines (e.g. of the ZVDH (Central Association of German Roofers) for Germany, Austrian Standard, ÖNORM B 4119, for Austria, ...) must be observed!

Do not hesitate to contact our applications engineers who are always pleased to provide information!

The roof underlay does not replace roof covering. The roof must be covered during the period of the specified weathering time. Early covering has a positive effect on the resistance to ageing.

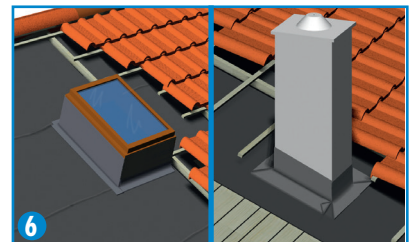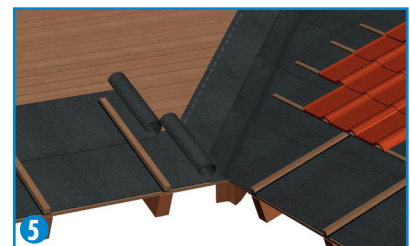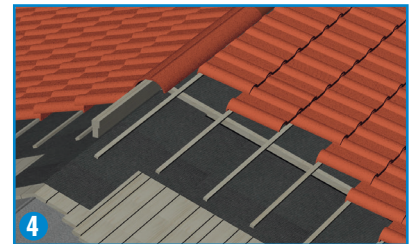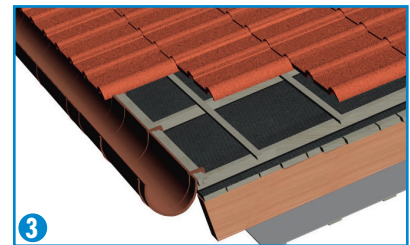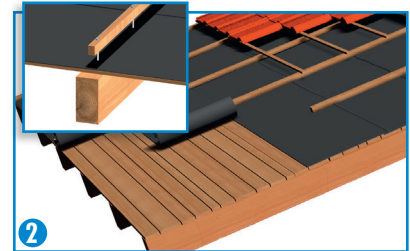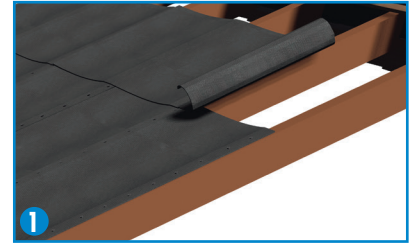

ISOCELL GmbH
Gewerbestraße 9
5202 NEUMARKT AM WALLERSEE | Österreich
Tel.: +43 6216 4108 | Fax: +43 6216 7979
office@isocell.at

ISOCELL SCHWEIZ AG
Herbergstrasse 29
9524 ZUZWIL | Suisse /Schweiz
Tel.: +41 71 544 47 20
office@isocell.ch

ISOCELL FRANCE
170 Rue Jean Monnet | ZAC de Prat Pip Sud
29490 GUIPAVAS | France
Tel.: +33 2 98 42 11 00 | Fax: +33 2 98 42 11 99
contact@isocell-france.fr

ISOCELL BUREEL BELGIË
Außenborner Weg 1 | Schoppen
4770 AMEL | Belgique
Tel.: +32 80 39 90 58 | Fax: +32 80 39 97 68
office@isocell.be

ISOCELL Sverige AB
Gamla Stallet | Stora Väsbys
194 37 UPPLANDS VÄSBY | Sverige
Tel.: +46 10 130 25 01
office@isocell.se

ISOCELL
www.isocell.com